



SB-15 SUBWOOFER



Features SB-15




- 15" neodymium speaker (4"/100mm voice coil)
- bandpass design
- super low-slung construction
- 8 x M8 mounting points
- 2 x M20 pole mount plate
- 2 Neutrik speakon 4-pin
- bass link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- 8 x rubber feet
- stackable in two directions
- wood housing plywood
- polyurea (PU) high scratch proof coating
- optional regular painting black or white

super low-slung construction!

for stacking and rigging:

H: SYSTEM 700

V: SYSTEM 373

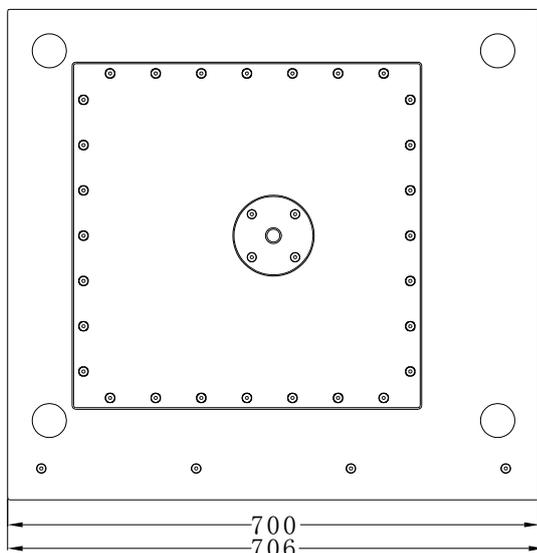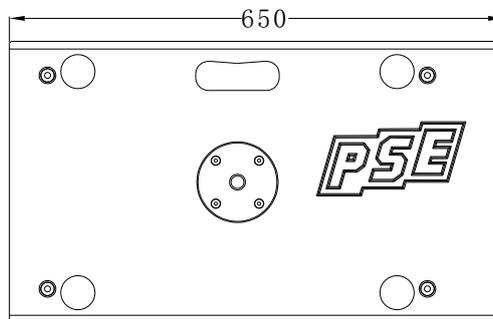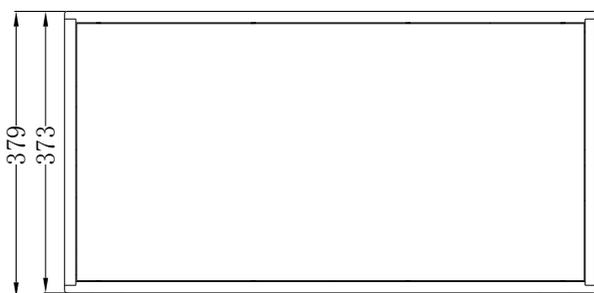

specification	
model	SB-15
rated impedance (optional)	8Ω (16Ω)
power handling capacity AES/peak*	1000W / 3000W*
available frequency response**	35Hz-180Hz
max. sound pressure level***	130dB
LF-transducer rated size	15"
LF-transducer voice coil diameter	4"/100mm
LF-transducer magnet structure	neodymium
dimension w/h/d in mm	700/373/650
weight	32.4kg

* peak 10ms, with TD-8000 amplifier and SB-15 max controller setup

** -10dB with SB-15 FR controller setup

***1m free field, pink noise, crest factor 10dB, with TD-8000 and SB-15 SPL controller setup