






LB-3 SUBWOOFER



Features LB-3

- 18" neodymium speaker (5"/125mm voice coil)
- bass reflex design
- rigging (flying) hardware integrated
- M20 pole mount plate
- 4 steering caster on the back side
- 2 Neutrik speakon 4-pin
- bass link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- 4 x rubber feet
- stackable
- wood housing plywood
- polyurea (PU) high scratch proof coating
- optional regular painting black or white
- optional without wheels
- optional front board with butterfly locks
- optional detto. with 4 steering caster

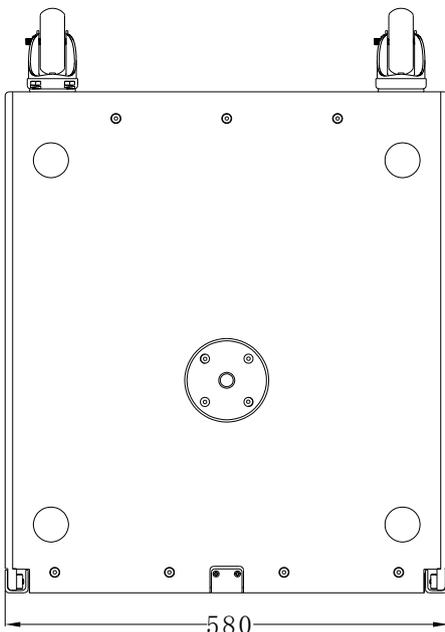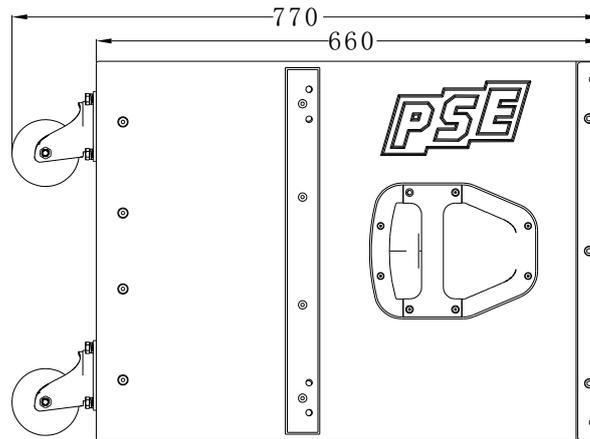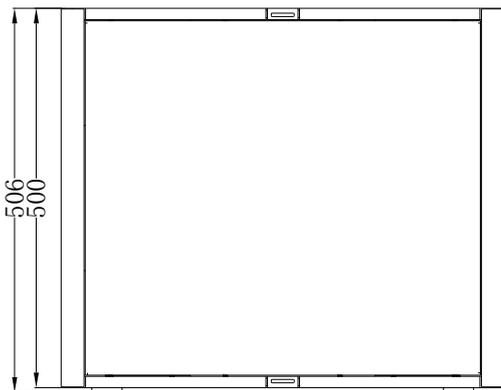

SYSTEM 580 for stacking and rigging

specification	
model	LB-3
rated impedance (optional)	8Ω (16Ω)
power handling capacity AES/peak*	1500W / 4500W*
available frequency response**	35Hz-180Hz
max. sound pressure level***	137dB
LF-transducer rated size	18"
LF-transducer voice coil diameter	5"/125mm
LF-transducer magnet structure	neodymium
dimension w/h/d in mm	580/500/660
weight	46kg

* peak 10ms, with TD-8000 amplifier and LB-3 max controller setup

** -10dB with LB-3 FR controller setup

***1m free field, pink noise, crest factor 10dB, with TD-8000 and LB-3 SPL controller setup