




B-12 SUBWOOFER



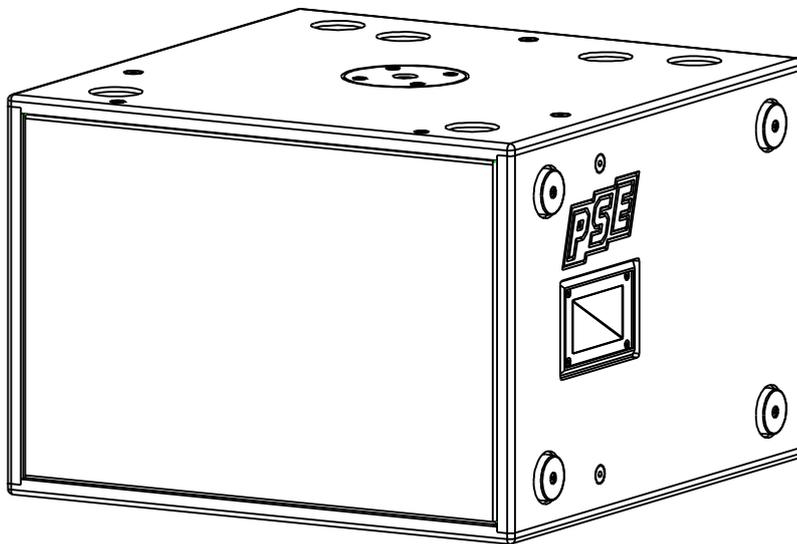


Features B-12

- 12" neodymium speaker (4"/100mm voice coil)
- 12 x M8 mounting points
- 2 x M20 pole mount plate
- 2 Neutrik speakon 4-pin
- bass link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- 8 x rubber feet
- stackable in two directions
- wood housing plywood 15mm
- polyurea (PU) high scratch proof coating
- optional regular painting black or white

for stacking and rigging:

H: SYSTEM 500
V: SYSTEM 350

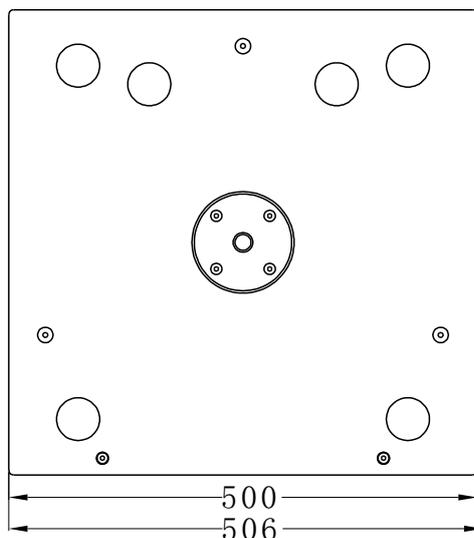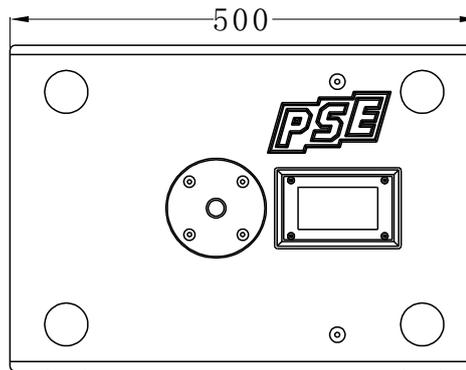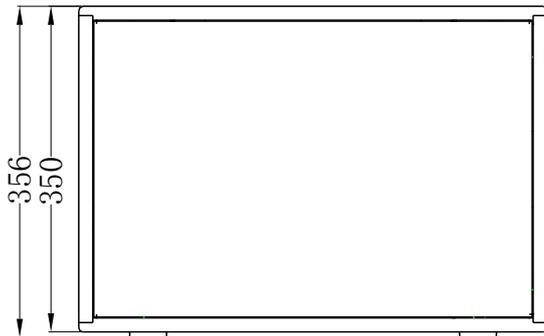

specification	
model	B-12
rated impedance (optional)	8Ω (16Ω)
power handling capacity AES/peak*	1000W / 3000W*
available frequency response**	43Hz-250Hz
max. sound pressure level***	130dB
LF-transducer rated size	12"
LF-transducer voice coil diameter	4"/100mm
LF-transducer magnet structure	neodymium
dimension w/h/d in mm	500/350/500
weight	19kg

* peak 10ms, with TD-8000 amplifier and B-12 max controller setup

** -10dB with B-12 FR controller setup

***1m free field, pink noise, crest factor 10dB, with TD-8000 and B-12 SPL controller setup