




B-12i

SUBWOOFER

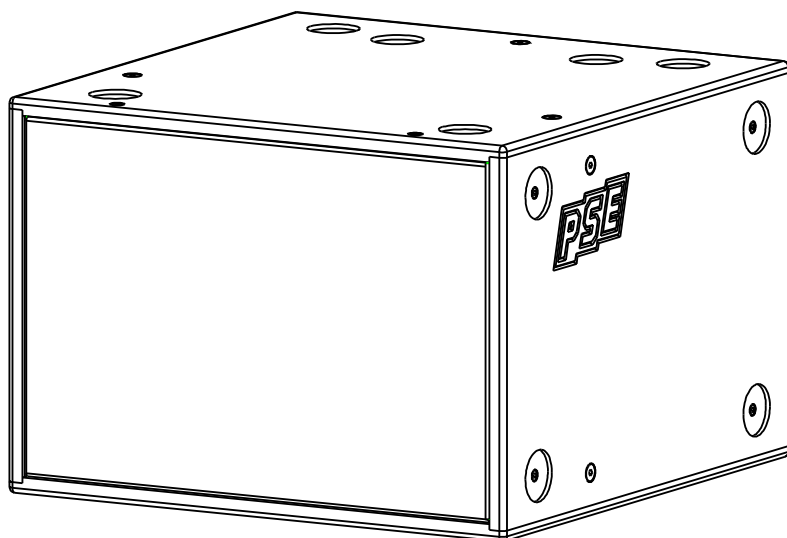




Features B-12i

- 12" speaker (4"/100mm voice coil)
- bass reflex design
- 12 x M8 mounting points
- 2 Neutrik speakon 4-pin
- bass link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- 4 x rubber feet
- stackable
- wood housing plywood 15mm
- texture painting black
- optional texture painting white or other colours
- optional plane matt painting black or white

for stacking and rigging:

H:SYSTEM 500

V:SYSTEM 350

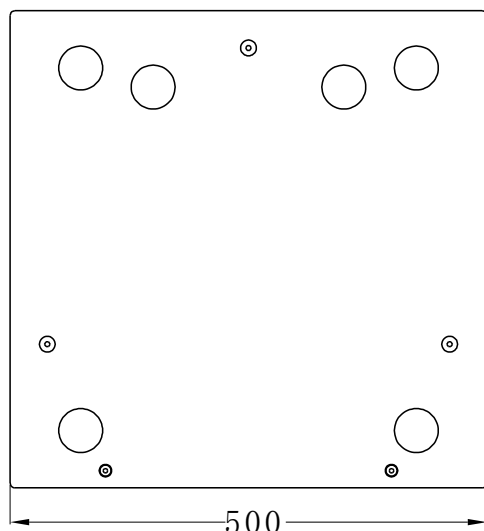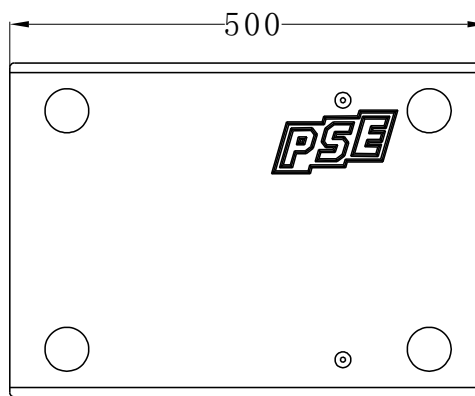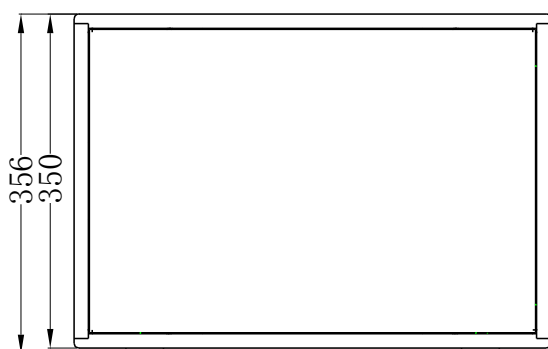

specification

| model | B-12i |
|-----------------------------------|----------------|
| rated impedance (optional) | 8Ω (16Ω) |
| power handling capacity AES/peak* | 1000W / 3000W* |
| available frequency response** | 43Hz-250Hz |
| max. sound pressure level*** | 130dB |
| LF-transducer rated size | 12" |
| LF-transducer voice coil diameter | 4"/100mm |
| LF-transducer magnet structure | ferrite |
| dimension w/h/d in mm | 500/350/500 |
| weight | 21kg |

* peak 10ms, with TD-8000 amplifier and B-12i max controller setup

** -10dB with B-12i FR controller setup

***1m free field, pink noise, crest factor 10dB, with TD-8000 and B-12i SPL controller setup